



	Price Specification
	Technical Specification

Client Information			
Date:		P.O. #:	
Last Name:		First Name:	
Ordered by:			
Establishment:			
Address:			
Phone:		Fax:	
Email address:			
	Order confirmation by email	Yes ☐	No ☐
	Subscribe to Physipro™ newsletter	Yes ☐	No ☐
	Factory installation of postural aids	Yes ☐	No ☐




WHEELCHAIR DESCRIPTION			
Folding manual wheelchair with double folding mechanism - Recommended for seat widths between 16" and 24". Maximum load capacity of 350 lbs. Recommended for bariatric users or for users that may have involuntary muscle spasms.			 CRASH TEST CERTIFIED




MODEL				
PRODUCT	DESCRIPTION	CODE	PRICE	CHOICE
XL RF	Folding manual wheelchair	XLRF-01	\$2920	☐

SEAT STRUCTURE									
EFFECTIVE SEAT WIDTH									
Seat Width	16"□	17"□	18"□				XL-	N/C	←
	19"□	20"□	21"□	22" □	23" □	24" □		\$275	
EFFECTIVE SEAT DEPTH									
Seat Depth	14"□	15"□	16"□	17"□	18"□		-	N/C	←
	19"□	20"□	21"□	22"□		\$165			
SEAT BASE OPTIONS									
Sling Seat	Tension adjustable nylon sling seat with two 2-inch Velcro « Hook » bands						S1520-... S1525-...	N/C	□
Rigid Seat	Rigid ABS seat pan with drop hooks			1" Drop Seat			XL05	\$325	□
				1 ½" Drop Seat					□
				2" Drop Seat					□

FRAME COLORS				
Glossy Black ☐	Charcoal ☐	Silver ☐	Scarlet Red ☐	Candy Purple ☐
Black Matte ☐	Glossy White ☐	Secure Blue ☐	Sunset Orange ☐	

FRONT SEAT-TO-FLOOR HEIGHT TABLES
(according to the type of wheelchair frame and forks)

XL RF STANDARD CROSS BRACE					XL RF INTEGRATED CROSS BRACE																																																																	
Hemi Frame—Short Fork					Hemi Frame—Short Fork																																																																	
<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td colspan="4"></td></tr><tr><td>B</td><td>13 □</td><td>13 ½ □</td><td colspan="2"></td></tr><tr><td>C</td><td>13 ½ □</td><td>14 □</td><td>14 ½ □</td><td></td></tr><tr><td>D</td><td>14 □</td><td>14 ½ □</td><td>15 □</td><td>15 ½ □</td></tr></table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A					B	13 □	13 ½ □			C	13 ½ □	14 □	14 ½ □		D	14 □	14 ½ □	15 □	15 ½ □	<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td colspan="4"></td></tr><tr><td>B</td><td>11 ½ □</td><td>12 □</td><td colspan="2"></td></tr><tr><td>C</td><td>12 □</td><td>12 ½ □</td><td>13 □</td><td></td></tr><tr><td>D</td><td>12 ½ □</td><td>13 □</td><td>13 ½ □</td><td>14 □</td></tr></table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A					B	11 ½ □	12 □			C	12 □	12 ½ □	13 □		D	12 ½ □	13 □	13 ½ □	14 □
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A																																																																						
B	13 □	13 ½ □																																																																				
C	13 ½ □	14 □	14 ½ □																																																																			
D	14 □	14 ½ □	15 □	15 ½ □																																																																		
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A																																																																						
B	11 ½ □	12 □																																																																				
C	12 □	12 ½ □	13 □																																																																			
D	12 ½ □	13 □	13 ½ □	14 □																																																																		
Standard Frame—Short Fork					Standard Frame—Short Fork																																																																	
<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td>15 ½ □</td><td colspan="3"></td></tr><tr><td>B</td><td>16 □</td><td>16 ½ □</td><td colspan="2"></td></tr><tr><td>C</td><td>16 ½ □</td><td>17 □</td><td>17 ½ □</td><td></td></tr><tr><td>D</td><td>17 □</td><td>17 ½ □</td><td>18 □</td><td>18 ½ □</td></tr></table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A	15 ½ □				B	16 □	16 ½ □			C	16 ½ □	17 □	17 ½ □		D	17 □	17 ½ □	18 □	18 ½ □	<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td>14 □</td><td colspan="3"></td></tr><tr><td>B</td><td>14 ½ □</td><td>15 □</td><td colspan="2"></td></tr><tr><td>C</td><td>15 □</td><td>15 ½ □</td><td>16 □</td><td></td></tr><tr><td>D</td><td>15 ½ □</td><td>16 □</td><td>16 ½ □</td><td>17 □</td></tr></table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A	14 □				B	14 ½ □	15 □			C	15 □	15 ½ □	16 □		D	15 ½ □	16 □	16 ½ □	17 □
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A	15 ½ □																																																																					
B	16 □	16 ½ □																																																																				
C	16 ½ □	17 □	17 ½ □																																																																			
D	17 □	17 ½ □	18 □	18 ½ □																																																																		
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A	14 □																																																																					
B	14 ½ □	15 □																																																																				
C	15 □	15 ½ □	16 □																																																																			
D	15 ½ □	16 □	16 ½ □	17 □																																																																		
Standard Frame—Long Fork					Standard Frame—Long Fork																																																																	
<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td>18 □</td><td>18 ½ □</td><td>19 □</td><td>19 ½ □</td></tr><tr><td>B</td><td>18 ½ □</td><td>19 □</td><td>19 ½ □</td><td>20 □</td></tr><tr><td>C</td><td>19 □</td><td>19 ½ □</td><td>20 □</td><td>20 ½ □</td></tr><tr><td>D</td><td>19 ½ □</td><td>20 □</td><td>20 ½ □</td><td>21 □</td></tr></table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A	18 □	18 ½ □	19 □	19 ½ □	B	18 ½ □	19 □	19 ½ □	20 □	C	19 □	19 ½ □	20 □	20 ½ □	D	19 ½ □	20 □	20 ½ □	21 □	<table><tr><th></th><th colspan="4">CASTER WHEEL DIAMETER</th></tr><tr><th>POSITION</th><th>5"</th><th>6"</th><th>7"</th><th>8"</th></tr><tr><td>A</td><td>16 ½ □</td><td>17 □</td><td>17 ½ □</td><td>18 □</td></tr><tr><td>B</td><td>17 □</td><td>17 ½ □</td><td>18 □</td><td>18 ½ □</td></tr><tr><td>C</td><td>17 ½ □</td><td>18 □</td><td>18 ½ □</td><td>19 □</td></tr><tr><td>D</td><td>18 □</td><td>18 ½ □</td><td>19 □</td><td>19 ½ □</td></tr></table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A	16 ½ □	17 □	17 ½ □	18 □	B	17 □	17 ½ □	18 □	18 ½ □	C	17 ½ □	18 □	18 ½ □	19 □	D	18 □	18 ½ □	19 □	19 ½ □
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A	18 □	18 ½ □	19 □	19 ½ □																																																																		
B	18 ½ □	19 □	19 ½ □	20 □																																																																		
C	19 □	19 ½ □	20 □	20 ½ □																																																																		
D	19 ½ □	20 □	20 ½ □	21 □																																																																		
	CASTER WHEEL DIAMETER																																																																					
POSITION	5"	6"	7"	8"																																																																		
A	16 ½ □	17 □	17 ½ □	18 □																																																																		
B	17 □	17 ½ □	18 □	18 ½ □																																																																		
C	17 ½ □	18 □	18 ½ □	19 □																																																																		
D	18 □	18 ½ □	19 □	19 ½ □																																																																		

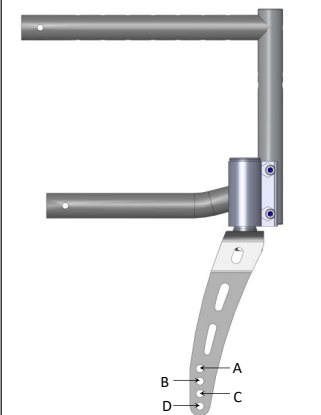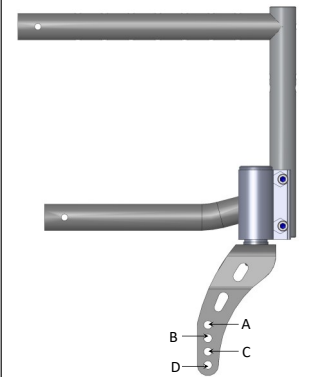


CASTER WHEELS					
Note	Please ensure the selected caster wheel corresponds with the selection made in the front seat-to-floor height tables.				
PRODUCT	DESCRIPTION			CODE	PRICE
Caster Wheels	Polyurethane	5" x 1 ½" □	6" x 1 ½" □	WHUN-	N/C
		8" x 1 ¼" □			
		5" x 1" □	6" x 1" □		
	Pneumatic	6" x 1 ¼" □	8" x 1 ¼" □	WHPG-	\$125 Pair

REAR SEAT-TO-FLOOR HEIGHT INFORMATION TABLES

The XL5 offers 10 seat-to-floor height adjustment positions by increments of ½".

The following tables indicate the position needed to obtain the desired seat-to-floor height, according to the chosen propulsion wheel diameter.

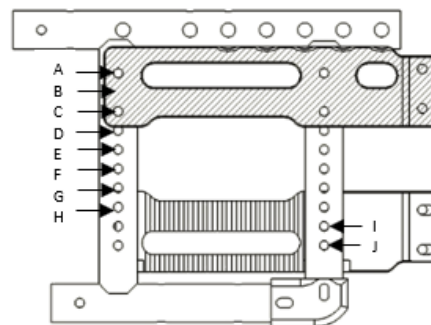


XL RF	Standard Cross Brace				XL RF	Integrated Cross Brace			
	Propulsion Wheel Diameter					Propulsion Wheel Diameter			
	20"	22"	24"	26"		20"	22"	24"	26"
A	13" □	14" □	15" □	16" □	A	11 ½" □	12 ½" □	13 ½" □	14 ½" □
B	13 ½" □	14 ½" □	15 ½" □	16 ½" □	B	12" □	13" □	14" □	15" □
C	14" □	15" □	16" □	17" □	C	12 ½" □	13 ½" □	14 ½" □	15 ½" □
D	14 ½" □	15 ½" □	16 ½" □	17 ½" □	D	13" □	14" □	15" □	16" □
E	15" □	16" □	17" □	18" □	E	13 ½" □	14½" □	15 ½" □	16 ½" □
F	15 ½" □	16 ½" □	17 ½" □	18 ½" □	F	14" □	15" □	16" □	17" □
G	16" □	17" □	18" □	19" □	G	14 ½" □	15 ½" □	16 ½" □	17 ½" □
H	16 ½" □	17 ½" □	18 ½" □	19 ½" □	H	15" □	16" □	17" □	18" □
I	17" □	18" □	19" □	20" □	I	15 ½" □	16 ½" □	17 ½" □	18 ½" □
J	17 ½" □	18 ½" □	19 ½" □	20 ½" □	J	16" □	17" □	18" □	19" □
Note	These measurements are for reference only. They may vary depending on the propulsion wheel diameter, seat angle and position of the axle mounting plate.								

PROPULSION WHEEL POSITION

Note

Position #5 and above are incompatible with a 24" propulsion wheel and a depth of 16".

Please specify the desired position: _____



PROPULSION WHEELS									
Note	Please ensure the selected propulsion wheel diameter corresponds with the selection made in the rear seat-to-floor height tables.								
PRODUCT	DESCRIPTION						CODE	PRICE	CHOICE
Rims	Mag Wheel						NX52MA	N/C	☐
	Spoke Wheel						NX52SW	N/C	☐
Tires	Diameter	20" ☐	22" ☐	24" ☐			-	-	←
	Polyurethane						NX53UR	N/C	☐
	Standard pressure						NX53SP	N/C	☐
	High pressure						NX53HP	\$153 Pair	☐
Handrims	Aluminium						NX44	N/C	☐
	Plastic Coated						NX45	\$130 Pair	☐
	Anti-slip						XL85	\$305 Pair	☐
	Vertical Projection						XL84	\$305 Pair	☐
	Natural Fit, Standard Grip (Aluminium handrim)						NXFIT22	\$320 Pair	☐
							NXFIT24		☐
	½-inch closer adjustment (Reduce overall width by 1")						-	N/C	☐
Omit (Reduce overall width by 1 ½")						-	N/C	☐	
Axles	Threaded Axles						XL47	N/C	☐
	Quick-release Axles						XL48	N/C	☐
	Extension plates for amputee (integrated to mounting plate)						XL76	\$89 Pair	☐
Camber Angle	0° camber angle						-	N/C	☐
	3° camber angle						XL78	N/C	☐
ONE ARM DRIVE MECHANISM									
One Arm Drive Mechanism	One-Arm Propulsion Mechanism Left ☐ Right ☐						XL68	\$1630	←
WHEEL LOCKS									
Wheel Locks	Push-to-lock						XL29	N/C	☐
	Pull-to-lock						XL55	N/C	☐
	One-Arm wheel lock Left ☐ Right ☐						XL83	\$417	←
	Anti-rollback						XL89	\$358 Pair	☐
Extension Handles	Fixed Extension Handle - 6"						XL30	\$40 Pair	☐
	Telescopic Extension Handle - 4 ½"						XL31	\$60 Pair	☐
ANTI-TIPS									
Anti-Tips	Alumium anti-tips						XL40A XL40B	N/C	☐
BACK POSTS									
	All back post are adjustable in angle and height by increments of 1".								
Standard Back Posts (with grip handles)	Medium	16" ☐	17" ☐	18" ☐	19" ☐	20" ☐	XLH1620	N/C	←
	Long	21" ☐	22" ☐	23" ☐	24" ☐	25" ☐	XLH2125	\$95 Pair	←
Dynamic Back Posts	Medium	18" ☐	19" ☐	20" ☐	21" ☐	22" ☐	XLDYNA	\$575 Pair	←
	Long	23" ☐	24" ☐	25" ☐	26" ☐	27" ☐			
Fold-Down Back Posts	Medium	16" ☐	17" ☐	18" ☐	19" ☐	20" ☐	SP35	\$453 Pair	←
	Long	21" ☐	22" ☐	23" ☐	24" ☐	25" ☐	SP36		

BACK POSTS					
PRODUCT	DESCRIPTION		CODE	PRICE	CHOICE
Back Post Angle	Straight 0°		XLHR0	N/C	☐
	Bend 8°		XLHR8	N/C	☐
	115° & 120° BACKREST ANGLES: Not compatible with Dynamic Back posts.				
Backrest Angle	Adjustable in increment of 5° 85° ☐ 90° ☐ 95° ☐ 100° ☐ 105° ☐ 110° ☐ 115° ☐  120° ☐ 		-	N/C	←
STROLLER BAR					
	STROLLER BAR: Can not be installed when a tension bar is requested.				
Stroller Bar	Angle adjustable stroller bar 		XL09...	\$145	☐
ARMREST					
Notes	"U" TYPE ARMREST: Removable, flip-back armrests, adjustable in height by increments of ½", includes locking mechanism and clothing guards. Provides ½" clearance on each side.				
	"T" TYPE ARMREST: Removable armrests, adjustable in height by increments of ½", includes locking mechanism and clothing guards. Provides ½" clearance on each side.				
	"L" TYPE ARMREST: Removable flip back armrests, adjustable in height by increments of ½", includes clothing guards.				
"U" Type	Lowered - Adjustable from 6 ¾" to 9 ½"		XL10-AB	\$112	☐
	Standard - Adjustable from 8 ½" to 13"		XL10-ST	N/C	☐
	Elevated - Adjustable from 12" to 16 ½"		XL10-SE	\$112	☐
"T" Type	Lowered - Adjustable from 7" to 12"		08-TX1-	\$112	☐
	Standard - Adjustable from 8" to 14"		08-TX2-	N/C	☐
"L" Type	Standard - Adjustable from 8" to 14"		XL11-	N/C	☐
ARMREST PADS					
	TUBULAR: Available with "L" Type armrest only.				
Armrest Pads	Foam Pad - Desk length (2 ¼" x 10")		-FS	N/C	☐
	Foam Pad - Full length (2 ¼" x 14")		-FL	N/C	☐
	Waterfall Style Gel Pad - Desk length (2 ¾" x 9") 		-GS	\$256 Pair	☐
	Waterfall Style Gel Pad - Full Length (2 ¾" x 13 ½") 		-GL	\$256 Pair	☐
	Waterfall Style Foam Pad - Full length (2 ¼" x 14")		-PL	\$188 Pair	☐
	Tubular 		XL12T	\$340 Pair	☐
Armrest Pad Extension	3" Armrest pad extension		PH-03046	\$124 Pair	☐
FOOTREST					
Notes	Footrest can be swivelled inwards or outwards, is removable and is equipped with a locking mechanism. Adjustable in length from 10 ½" to 21" by increments of ½".				
	Minimal length of the 60° footrest is 11 ¼".				
Footrest Angle	60°		NX60	N/C	☐
	70°		NX70	N/C	☐
	90°		NX90	\$149 Pair	☐
Footrest Length	Small:	10 ½" to 13". Specify desired length: _____" (± ¼")	XL62-S	N/C	←
	Medium:	12" to 17". Specify desired length: _____" (± ¼")	XL62-M		←
	Long:	16" to 21". Specify desired length: _____" (± ¼")	XL62-L		←

ELEVATING AND ARTICULATING LEGREST										
Note	The elevating and articulating legrest is equipped with a locking mechanism and can be installed on the same fittings as the standard footrest.									
PRODUCT	DESCRIPTION					CODE	PRICE	CHOICE		
Elevating and Articulating Legrest	X-Small:	12"□	13"□	14"□	XL65	\$545Pair	↶			
	Small:	14"□	15"□	16"□	XL15		↶			
	Medium:	17"□	18"□	19"□	XL16		↶			
	Long:	20"□	21"□	22"□	XL66		↶			
CALF SUPPORTS										
Note	Calf support is adjustable in height, depth and angle.									
🔧	Calf support is included with the elevating and articulating legrest.									
Calf supports	6" x 8" - Flat Padding 🔧					XL18	\$155 ea.	□		
	6" x 8" - Profiled Padding 🔧					XL20	\$165 ea.	□		
CALF STRAPS										
Calf Straps	Single - 4"					XL22-	\$90	□		
	Double - 8"					XL24-	\$115	□		
FOOTPLATES										
Flip-Up Footplates	Aluminium footplates, 6" X 8"					XL26S-	N/C	□		
	Aluminium footplates, 7" X 8"					XL26S-	N/C	□		
Flip-up & Adjustable Footplates	Aluminium footplates with angle and depth adjustments					XL27S-	\$180 Pair	□		
	Size:	5" X 6 ¾"								
	Aluminium footplates with angle and depth adjustments					XL27S-	\$180 Pair	□		
	Size:	6" X 6 ¾"								
Oversized Flip-up Footplates	Aluminium footplates					XL26G-	\$34 Pair	↶		
	Width : 6" □ 7" □									
	Depth : 9" □ 10" □									
Oversized Flip-up & Adjustable Footplates	Footplate Sizes	Seat Width						XL...X...	\$195 Pair	↶
		14"	15"	16"	17"	18"	19" +			
	5" x 9"	□	□	□	□	□	□			
	6" x 9"		□	□	□	□	□			
	6" x 10"		□	□	□	□	□			
	7" x 9"		N/A		□	□	□			
	7" x 10"	□			□	□				
	8" x 9"				□					
	8" x 10"				□					
One Piece Flip-up Footplate	Aluminium footplate with angle and depth adjustments					XFW..-	\$350	↶		
	Depth:	6"□	8" □	10" □						
Heel Support Strap	Adjustable in length					XL28-	N/C	□		
PELVIC POSITIONING BELTS										
Positioning Belts	Pelvic positioning belt with auto-style buckle, 2"					XL41	\$75	□		
	2-Point Padded Hip Belt with auto-style buckle					SC7541	\$115	□		
	Padded "Y-Style" 4-Point Hip Belt with auto-style buckle					SC7592	\$170	□		

ADAPTED TRANSPORT SECUREMENT POINTS					
PRODUCT	DESCRIPTION		CODE	PRICE	CHOICE
Securement Points		4 Tie-down strap securement points for adapted transport, Certified ISO/DIS 7176-19:2019	XL42	N/C	☐
REFLECTIVE SAFETY STICKERS					
Reflective safety stickers	Sticker pack includes 2 reflective white stickers and 2 reflective red stickers		XL74	\$12	☐
SPOKE-GUARDS					
Spoke-Guards	Transparents spoke-guards		NX46-	\$180 Pair	☐
	Physipro Spoke-Guards (special design) Please visit: https://www.physipro.com/product-category/spoke-guard/ Desired model #: _____		PR-	\$346 Pair	☐
FRONT BUMPER					
Front bumper	Front bumper		XL72	\$87	☐
CANE HOLDERS					
Cane Holders	Single	Left ☐ Right ☐	XL50S	\$75	☐
	Double	Left ☐ Right ☐	XL51D	\$85	☐
OXYGEN TANK HOLDER					
Oxygen Tank Holder	Compatible with size D and E oxygen tanks only Not compatible with the stroller bar		ST-03166	\$180	☐
SEAT CUSHIONS					
	SEAT CUSHIONS: The dimension of the cushion will be adapted to the size of the wheelchair. Flat cut. For custom cushion, please fill in the order form.				
Urethane & Memory Foam Cushions	Thickness of 2", flat		S3350-...	\$147	☐
	Thickness of 3", flat		S3350-...	\$147	☐
	Thickness of 4", flat		S3350-...	\$147	☐
Siliko 	Thickness of 3"		S5100-...	See OF	☐
Contour Insert 	Thickness of 3"		S2366-...	See OF	☐
Physiair 	Thickness of 3"		S5000-...	See OF	☐
BACKRESTS					
	For non-standard backrest dimensions or for the Axis or Premium with Velcro surface, please fill in the backrest's order form.				
Flexible	Flexible - Nylon backrest		D4240-...	N/C	☐
Standard	Standard - Tension adjustable backrest		D4250-...	\$142	☐
Axis 	Tension adjustable backrest	Width: 16" ☐ 18" ☐ 20" ☐	D5209-...	\$395	
		Height: 18" ☐ 20" ☐			
Premium 	Tension adjustable backrest	Width: 16" ☐ 18" ☐ 20" ☐	D5200-...	\$410	
		Height: 18" ☐ 20" ☐			
HP2 Profiled 	Rigid shell backrest (aluminium)	Width: 16" ☐ 18" ☐ 20" ☐	HPP...	\$822	
		Height: 18" ☐ 20" ☐			
HP2 Contour 	Rigid shell backrest (aluminium)	Width: 16" ☐ 18" ☐ 20" ☐	HPC...	\$822	
		Height: 18" ☐ 20" ☐			

HEADREST SUPPORTS AND PADS						
PRODUCT		DESCRIPTION		CODE	PRICE	CHOICE
Multiadjustable Offset Headrest Support	Offset Headrest Support			XL35	\$209	☐
	Standard Headrest Pad	Small - 7" x 4"		AT5000	\$220	☐
		Medium - 8" x 5"		AT5005		☐
		Large - 9" x 6"		AT5010		☐
Symbio Headrest Support	Symbio Headrest Support (comes with a Standard Headrest Pad)			-	\$665	☐
	Standard Headrest Pad	Small - 7" x 4"		NX33-KS		☐
		Medium - 8" x 5"		NX33-KM		☐
		Large - 9" x 6"		NX33-KL		☐
TENSION BARS						
Tension Bars	Folding tension bar			XL87	\$165	☐
	Folding tension bar with multi-adjustable headrest support mounting fixture			XL88	\$235	☐
MULTIADJUSTABLE AMPUTEE SUPPORT						
Amputee Support	Multiadjustable amputee support with 2" cushion			XL75	\$340	☐
	7" x 8" x 2"	Left ☐	Right ☐			←
	8" x 11" x 2"	Left ☐	Right ☐			
PROTECTOR PADS FOR LEGREST TUBE						
Protector pads	Knee height with eyelet - Left			MI7301	\$65	☐
	Knee height with eyelet - Right			MI7304		☐
						
Multiadjustable Offset Headrest Support	Symbio Headrest Support	Standard Headrest Pad	Folding Tension Bar	Folding Tension Bar with headrest support mounting fixture	Multiadjustable Amputee Support	

YOU DIDN'T FIND WHAT YOU WANT ON THIS ORDER FORM?
Describe your need below. Our customer service will evaluate your request and give you a detailed quote.

Notes :