





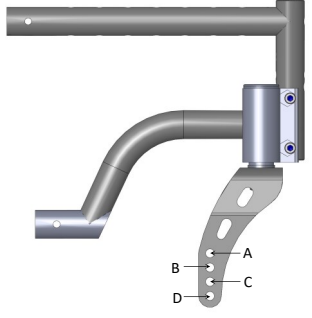
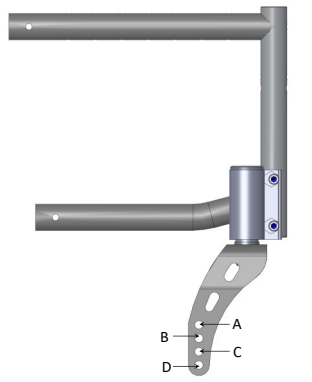
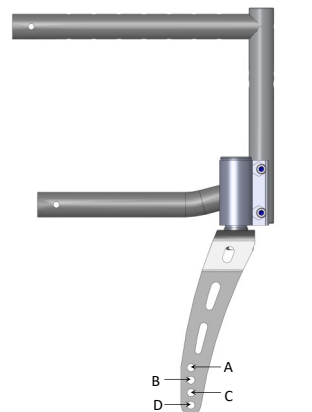
Client Information				
Date:		P.O. #:		
Last Name:		First Name:		
Ordered by:				
Establishment:				
Address:				
Phone:		Fax:		
Email address:				
<input type="checkbox"/> Price Specification <input type="checkbox"/> Technical Specification	➔	Order confirmation by email	Yes <input type="checkbox"/>	No <input type="checkbox"/>
		Subscribe to Physipro™ newsletter	Yes <input type="checkbox"/>	No <input type="checkbox"/>
		Factory installation of postural aids	Yes <input type="checkbox"/>	No <input type="checkbox"/>

XL5 MODEL								
PRODUCT	DESCRIPTION				CODE	PRICE	CHOICE	
XL5	Folding manual wheelchair with single crossbar. For seat widths between 14" and 20". Maximum load capacity of 265 lbs.					XL5-01	\$2125	<input type="checkbox"/>
➔	Please select the desired frame color.				Glossy Black	<input type="checkbox"/>	Secure Blue	<input type="checkbox"/>
XL5 SEAT STRUCTURE								
Effective Seat Width	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>	XL-	N/C	←
	19" <input type="checkbox"/>	20" <input type="checkbox"/>					\$275	
Effective Seat Depth	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>	-	N/C	←
	19" <input type="checkbox"/>	20" <input type="checkbox"/>	21" <input type="checkbox"/>	22" <input type="checkbox"/>			\$165	

XL5 HD MODEL								
PRODUCT	DESCRIPTION				CODE	PRICE	CHOICE	
XL5 HD	Folding manual wheelchair with double crossbar. For seat widths between 16" and 24". Maximum load capacity of 350 lbs. Recommended for bariatric users or for users that may have involuntary muscle spasms.					XLRF-01	\$2385	<input type="checkbox"/>
➔	Please select the desired frame color.				Glossy Black	<input type="checkbox"/>	Secure Blue	<input type="checkbox"/>
XL5 HD SEAT STRUCTURE								
Effective Seat Width	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>			XL-	N/C	←
	19" <input type="checkbox"/>	20" <input type="checkbox"/>	21" <input type="checkbox"/>	22" <input type="checkbox"/>	23" <input type="checkbox"/>		24" <input type="checkbox"/>	
Effective Seat Depth	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>	-	N/C	←
	19" <input type="checkbox"/>	20" <input type="checkbox"/>	21" <input type="checkbox"/>	22" <input type="checkbox"/>			\$165	

SEAT BASE OPTION						
Sling Seat	Tension adjustable nylon sling seat with two 2-inch Velcro « Hook » bands			\$1520-... \$1525-...	N/C	<input type="checkbox"/>

**FRONT SEAT-TO-FLOOR HEIGHT TABLES
(according to the type of wheelchair frame and forks)**

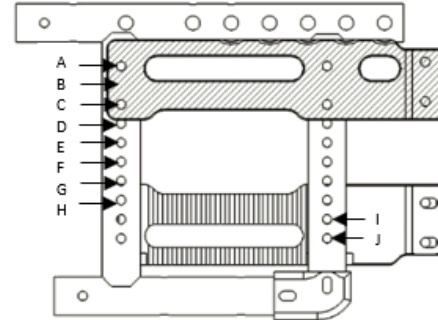
XL5 & XL5 HD STANDARD CROSS BRACE					XL5 & XL5 HD INTEGRATED CROSS BRACE																																																																
Hemi Frame—Short Fork					Hemi Frame—Short Fork																																																																
<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>13 □</td> <td>13 ½ □</td> <td></td> <td></td> </tr> <tr> <td>C</td> <td>13 ½ □</td> <td>14 □</td> <td>14 ½ □</td> <td></td> </tr> <tr> <td>D</td> <td>14 □</td> <td>14 ½ □</td> <td>15 □</td> <td>15 ½ □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A					B	13 □	13 ½ □			C	13 ½ □	14 □	14 ½ □		D	14 □	14 ½ □	15 □	15 ½ □	<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>11 ½ □</td> <td>12 □</td> <td></td> <td></td> </tr> <tr> <td>C</td> <td>12 □</td> <td>12 ½ □</td> <td>13 □</td> <td></td> </tr> <tr> <td>D</td> <td>12 ½ □</td> <td>13 □</td> <td>13 ½ □</td> <td>14 □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A					B	11 ½ □	12 □			C	12 □	12 ½ □	13 □		D	12 ½ □	13 □	13 ½ □
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A																																																																					
B	13 □	13 ½ □																																																																			
C	13 ½ □	14 □	14 ½ □																																																																		
D	14 □	14 ½ □	15 □	15 ½ □																																																																	
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A																																																																					
B	11 ½ □	12 □																																																																			
C	12 □	12 ½ □	13 □																																																																		
D	12 ½ □	13 □	13 ½ □	14 □																																																																	
Standard Frame—Short Fork					Standard Frame—Short Fork																																																																
<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>15 ½ □</td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>16 □</td> <td>16 ½ □</td> <td></td> <td></td> </tr> <tr> <td>C</td> <td>16 ½ □</td> <td>17 □</td> <td>17 ½ □</td> <td></td> </tr> <tr> <td>D</td> <td>17 □</td> <td>17 ½ □</td> <td>18 □</td> <td>18 ½ □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A	15 ½ □				B	16 □	16 ½ □			C	16 ½ □	17 □	17 ½ □		D	17 □	17 ½ □	18 □	18 ½ □	<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>14 □</td> <td></td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>14 ½ □</td> <td>15 □</td> <td></td> <td></td> </tr> <tr> <td>C</td> <td>15 □</td> <td>15 ½ □</td> <td>16 □</td> <td></td> </tr> <tr> <td>D</td> <td>15 ½ □</td> <td>16 □</td> <td>16 ½ □</td> <td>17 □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A	14 □				B	14 ½ □	15 □			C	15 □	15 ½ □	16 □		D	15 ½ □	16 □	16 ½ □
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A	15 ½ □																																																																				
B	16 □	16 ½ □																																																																			
C	16 ½ □	17 □	17 ½ □																																																																		
D	17 □	17 ½ □	18 □	18 ½ □																																																																	
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A	14 □																																																																				
B	14 ½ □	15 □																																																																			
C	15 □	15 ½ □	16 □																																																																		
D	15 ½ □	16 □	16 ½ □	17 □																																																																	
Standard Frame—Long Fork					Standard Frame—Long Fork																																																																
<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>18 □</td> <td>18 ½ □</td> <td>19 □</td> <td>19 ½ □</td> </tr> <tr> <td>B</td> <td>18 ½ □</td> <td>19 □</td> <td>19 ½ □</td> <td>20 □</td> </tr> <tr> <td>C</td> <td>19 □</td> <td>19 ½ □</td> <td>20 □</td> <td>20 ½ □</td> </tr> <tr> <td>D</td> <td>19 ½ □</td> <td>20 □</td> <td>20 ½ □</td> <td>21 □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER					POSITION	5"	6"	7"	8"	A	18 □	18 ½ □	19 □	19 ½ □	B	18 ½ □	19 □	19 ½ □	20 □	C	19 □	19 ½ □	20 □	20 ½ □	D	19 ½ □	20 □	20 ½ □	21 □	<table border="1"> <thead> <tr> <th></th> <th colspan="4">CASTER WHEEL DIAMETER</th> </tr> <tr> <th>POSITION</th> <th>5"</th> <th>6"</th> <th>7"</th> <th>8"</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>16 ½ □</td> <td>17 □</td> <td>17 ½ □</td> <td>18 □</td> </tr> <tr> <td>B</td> <td>17 □</td> <td>17 ½ □</td> <td>18 □</td> <td>18 ½ □</td> </tr> <tr> <td>C</td> <td>17 ½ □</td> <td>18 □</td> <td>18 ½ □</td> <td>19 □</td> </tr> <tr> <td>D</td> <td>18 □</td> <td>18 ½ □</td> <td>19 □</td> <td>19 ½ □</td> </tr> </tbody> </table>						CASTER WHEEL DIAMETER				POSITION	5"	6"	7"	8"	A	16 ½ □	17 □	17 ½ □	18 □	B	17 □	17 ½ □	18 □	18 ½ □	C	17 ½ □	18 □	18 ½ □	19 □	D	18 □	18 ½ □	19 □
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A	18 □	18 ½ □	19 □	19 ½ □																																																																	
B	18 ½ □	19 □	19 ½ □	20 □																																																																	
C	19 □	19 ½ □	20 □	20 ½ □																																																																	
D	19 ½ □	20 □	20 ½ □	21 □																																																																	
	CASTER WHEEL DIAMETER																																																																				
POSITION	5"	6"	7"	8"																																																																	
A	16 ½ □	17 □	17 ½ □	18 □																																																																	
B	17 □	17 ½ □	18 □	18 ½ □																																																																	
C	17 ½ □	18 □	18 ½ □	19 □																																																																	
D	18 □	18 ½ □	19 □	19 ½ □																																																																	

CASTER WHEELS							
Note	Please ensure the selected caster wheel corresponds with the selection made in the front seat-to-floor height tables.						
PRODUCT	DESCRIPTION			CODE	PRICE	CHOICE	
Caster Wheels	Polyurethane	5" x 1 ½" □	6" x 1 ½" □	8" x 1 ½" □	WHUN-	N/C	←
		8" x 1 ¼" □					
	Pneumatic	5" x 1" □	6" x 1" □	7" x 1" □	WHUG-	\$100 Pair	←
		6" x 1 ¼" □	8" x 1 ¼" □			\$125 Pair	

REAR SEAT-TO-FLOOR HEIGHT INFORMATION TABLES

The XL5 & XL5 HD offers 10 seat-to-floor height adjustment positions by increments of ½".

The following tables indicate the position needed to obtain the desired seat-to-floor height, according to the chosen propulsion wheel diameter.



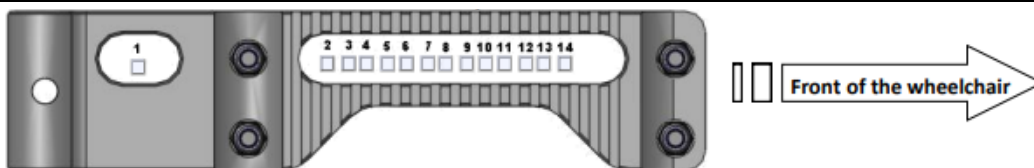
XL5 & XL5 HD	Standard Cross Brace			XL5 & XL5 HD	Integrated Cross Brace		
	Propulsion Wheel Diameter				Propulsion Wheel Diameter		
	20"	22"	24"		20"	22"	24"
A	13" <input type="checkbox"/>	14" <input type="checkbox"/>	15" <input type="checkbox"/>	A	11 ½" <input type="checkbox"/>	12 ½" <input type="checkbox"/>	13 ½" <input type="checkbox"/>
B	13 ½" <input type="checkbox"/>	14 ½" <input type="checkbox"/>	15 ½" <input type="checkbox"/>	B	12" <input type="checkbox"/>	13" <input type="checkbox"/>	14" <input type="checkbox"/>
C	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>	C	12 ½" <input type="checkbox"/>	13 ½" <input type="checkbox"/>	14 ½" <input type="checkbox"/>
D	14 ½" <input type="checkbox"/>	15 ½" <input type="checkbox"/>	16 ½" <input type="checkbox"/>	D	13" <input type="checkbox"/>	14" <input type="checkbox"/>	15" <input type="checkbox"/>
E	15" <input type="checkbox"/>	16" <input type="checkbox"/>	17" <input type="checkbox"/>	E	13 ½" <input type="checkbox"/>	14½" <input type="checkbox"/>	15 ½" <input type="checkbox"/>
F	15 ½" <input type="checkbox"/>	16 ½" <input type="checkbox"/>	17 ½" <input type="checkbox"/>	F	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>
G	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>	G	14 ½" <input type="checkbox"/>	15 ½" <input type="checkbox"/>	16 ½" <input type="checkbox"/>
H	16 ½" <input type="checkbox"/>	17 ½" <input type="checkbox"/>	18 ½" <input type="checkbox"/>	H	15" <input type="checkbox"/>	16" <input type="checkbox"/>	17" <input type="checkbox"/>
I	17" <input type="checkbox"/>	18" <input type="checkbox"/>	19" <input type="checkbox"/>	I	15 ½" <input type="checkbox"/>	16 ½" <input type="checkbox"/>	17 ½" <input type="checkbox"/>
J	17 ½" <input type="checkbox"/>	18 ½" <input type="checkbox"/>	19 ½" <input type="checkbox"/>	J	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>

Note These measurements are for reference only. They may vary depending on the propulsion wheel diameter, seat angle and position of the axle mounting plate.

PROPULSION WHEEL POSITION





Note Position #5 and above are incompatible with a 24" propulsion wheel and a depth of 16".

Please specify the desired position: _____



PROPULSION WHEELS										
Note	Please ensure the selected propulsion wheel diameter corresponds with the selection made in the rear seat-to-floor height tables.									
PRODUCT	DESCRIPTION					CODE	PRICE	CHOICE		
Rims	Mag Wheel					NX52MA	N/C	<input type="checkbox"/>		
Tires	Diameter	20" <input type="checkbox"/>	22" <input type="checkbox"/>	24" <input type="checkbox"/>		-	-	←		
	Polyurethane					NX53UR	N/C	<input type="checkbox"/>		
	Standard pressure					NX53SP	N/C	<input type="checkbox"/>		
Handrims	Aluminium					NX44	N/C	<input type="checkbox"/>		
	Plastic Coated					NX45	\$130 Pair	<input type="checkbox"/>		
	Anti-slip					XL85	\$305 Pair	<input type="checkbox"/>		
	Vertical Projection					XL84	\$305 Pair	<input type="checkbox"/>		
	½-inch closer adjustment (Reduce overall width by 1")					-	N/C	<input type="checkbox"/>		
	Omit (Reduce overall width by 1 ½")					-	N/C	<input type="checkbox"/>		
Axles	Threaded Axles					XL47	N/C	<input type="checkbox"/>		
	Quick-release Axles					XL48	N/C	<input type="checkbox"/>		
	Extension plates for amputee (integrated to mounting plate)					XL76	\$89 Pair	<input type="checkbox"/>		
ONE ARM DRIVE MECHANISM										
One Arm Drive Mechanism	One-Arm Propulsion Mechanism				Left <input type="checkbox"/>	Right <input type="checkbox"/>	XL68	\$1100	←	
WHEEL LOCKS										
Wheel Locks	Push-to-lock					XL29	N/C	<input type="checkbox"/>		
	Pull-to-lock					XL55	N/C	<input type="checkbox"/>		
	One-Arm wheel lock				Left <input type="checkbox"/>	Right <input type="checkbox"/>	XL83	\$417	←	
Extension Handles	Fixed Extension Handle - 6"					XL30	N/C	<input type="checkbox"/>		
	Telescopic Extension Handle - 4 ½"					XL31	\$60 Pair	<input type="checkbox"/>		
ANTI-TIPS										
Anti-Tips	Alumium anti-tips					XL40A XL40B	N/C	<input type="checkbox"/>		
BACK POSTS										
Note	All back post are height adjustable by increments of 1".									
Standard Back Posts (with grip handles)	Medium	16" <input type="checkbox"/>	17" <input type="checkbox"/>	18" <input type="checkbox"/>	19" <input type="checkbox"/>	20" <input type="checkbox"/>	XLH1620	N/C	←	
	Long	21" <input type="checkbox"/>	22" <input type="checkbox"/>	23" <input type="checkbox"/>	24" <input type="checkbox"/>	25" <input type="checkbox"/>	XLH2125	\$95 Pair	←	
Back Post Angle	Straight 0°					XLHR0	N/C	<input type="checkbox"/>		
	Bend 8°					XLHR8	N/C	<input type="checkbox"/>		
Backrest Angle	Ajustable in increment of 5°									
	85° <input type="checkbox"/>	90° <input type="checkbox"/>	95° <input type="checkbox"/>	100° <input type="checkbox"/>			-	N/C	←	
	105° <input type="checkbox"/>	110° <input type="checkbox"/>	115° <input type="checkbox"/>	120° <input type="checkbox"/>						

ARMREST							
Notes	"U" TYPE ARMREST: Removable, flip-back armrests, adjustable in height by increments of ½", includes locking mechanism and clothing guards. Provides ½" clearance on each side.						
	"T" TYPE ARMREST: Removable armrests, adjustable in height by increments of ½", includes locking mechanism and clothing guards. Provides ½" clearance on each side.						
PRODUCT	DESCRIPTION	CODE	PRICE	CHOICE			
"U" Type	Lowered - Adjustable from 6 ¾" to 9 ½"	XL10-AB	\$263 Pair	<input type="checkbox"/>			
	Standard - Adjustable from 8 ½" to 13"	XL10-ST	\$263 Pair	<input type="checkbox"/>			
	Elevated - Adjustable from 12" to 16 ½"	XL10-SE	\$263 Pair	<input type="checkbox"/>			
"T" Type	Lowered - Adjustable from 7" to 12"	08-TX1-	\$112 Pair	<input type="checkbox"/>			
	Standard - Adjustable from 8" to 14"	08-TX2-	N/C	<input type="checkbox"/>			
ARMREST PADS							
Armrest Pads	Foam Pad - Desk length (2 ¼" x 10")	-FS	N/C	<input type="checkbox"/>			
	Foam Pad - Full length (2 ¼" x 14")	-FL	N/C	<input type="checkbox"/>			
Armrest Pad Extension	3" Armrest pad extension	PH-03046	\$124 Pair	<input type="checkbox"/>			
FOOTREST							
Notes	Footrest can be swivelled inwards or outwards, is removable and is equipped with a locking mechanism. Adjustable in length from 10 ½" to 21" by increments of ½".						
	Minimal length of the 60° footrest is 11 ¼".						
Footrest Angle	60°		NX60	N/C	<input type="checkbox"/>		
	70°		NX70	N/C	<input type="checkbox"/>		
	90°		NX90	\$149 Pair	<input type="checkbox"/>		
Footrest Length	Small:	10 ½" to 13". Specify desired length: _____ " (± ¼")	XL62-S	N/C	←		
	Medium:	12" to 17". Specify desired length: _____ " (± ¼")	XL62-M		←		
	Long:	16" to 21". Specify desired length: _____ " (± ¼")	XL62-L		←		
ELEVATING AND ARTICULATING LEGREST							
Note	The elevating and articulating legrest is equipped with a locking mechanism and can be installed on the same fittings as the standard footrest.						
Elevating and Articulating Legrest	X-Small:	12" <input type="checkbox"/>	13" <input type="checkbox"/>	14" <input type="checkbox"/>	XL65	\$545Pair	←
	Small:	14" <input type="checkbox"/>	15" <input type="checkbox"/>	16" <input type="checkbox"/>	XL15		←
	Medium:	17" <input type="checkbox"/>	18" <input type="checkbox"/>	19" <input type="checkbox"/>	XL16		←
	Long:	20" <input type="checkbox"/>	21" <input type="checkbox"/>	22" <input type="checkbox"/>	XL66		←
Note	A calf support is included at no charge when ordered with the elevating and articulating legrest. The calf support is adjustable in height, depth and angle.						
→	Please select your calf support.	Calf support - Flat Padding	XL18	N/C	<input type="checkbox"/>		
		Calf support - Profiled Padding (6" x 8")	XL20	N/C	<input type="checkbox"/>		

FOOTPLATES										
PRODUCT	DESCRIPTION		CODE	PRICE	CHOICE					
Flip-Up Footplates	Aluminium footplates, 6" X 8"		XL26S-	N/C	<input type="checkbox"/>					
	Aluminium footplates, 7" X 8"		XL26S-	N/C	<input type="checkbox"/>					
Flip-up & Adjustable Footplates	Aluminium footplates with angle and depth adjustments		XL27S-	\$180 Pair	<input type="checkbox"/>					
	Size:	5" X 6 ¾"								
	Aluminium footplates with angle and depth adjustments		XL27S-	\$180 Pair	<input type="checkbox"/>					
Size:	6" X 6 ¾"									
Oversized Flip-up Footplates	Aluminium footplates		XL26G-	\$60 Pair	←					
	Width : 6" <input type="checkbox"/> 7" <input type="checkbox"/>									
	Depth : 9" <input type="checkbox"/> 10" <input type="checkbox"/>									
Oversized Flip-up & Adjustable Footplates	Footplate Sizes	Seat Width						XL...X...	\$195 Pair	←
		14"	15"	16"	17"	18"	19" +			
	5" x 9"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	6" x 9"	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	6" x 10"		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	7" x 9"	N/A		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	7" x 10"		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
	8" x 9"		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
8" x 10"				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				
One Piece Flip-up Footplate	Aluminium footplate with angle and depth adjustments		XFW..-	\$350	←					
	Depth:	6" <input type="checkbox"/> 8" <input type="checkbox"/> 10" <input type="checkbox"/>								
Heel Support Strap	Adjustable in length		XL28-	N/C	<input type="checkbox"/>					
ADAPTED TRANSPORT SECUREMENT POINTS										
Securement Points	 4 Tie-down strap securement points for adapted transport, Certified ISO/DIS 7176-19:2019		XL42	N/C	<input type="checkbox"/>					
OXYGEN TANK HOLDER										
Oxygen Tank Holder	Compatible with size D and E oxygen tanks only Not compatible with the stroller bar		ST-03166	\$180	<input type="checkbox"/>					
TENSION BARS										
	STANDARD FOLDING TENSION BAR: Included with XL5 HD									
Tension Bars	Standard folding tension bar		XL87R-	\$165 	<input type="checkbox"/>					
	Folding tension bar with multi-adjustable headrest support mounting fixture		XL88R-	\$235	<input type="checkbox"/>					
SEAT CUSHIONS										
	SEAT CUSHIONS: The dimension of the cushion will be adapted to the size of the wheelchair. Flat cut.									
Urethane & Memory Foam Cushions	Thickness of 2", flat		S3350-...	\$126	<input type="checkbox"/>					
	Thickness of 3", flat		S3350-...	\$126	<input type="checkbox"/>					
	Thickness of 4", flat		S3350-...	\$126	<input type="checkbox"/>					
BACKRESTS										
Flexible	Flexible - Nylon backrest		D4240-...	N/C	<input type="checkbox"/>					
Standard	Standard - Tension adjustable backrest		D4250-...	\$142	<input type="checkbox"/>					

YOU DIDN'T FIND WHAT YOU WANT ON THIS ORDER FORM?
Describe your need below. Our customer service will evaluate your request and give you a detailed quote.

Notes :